






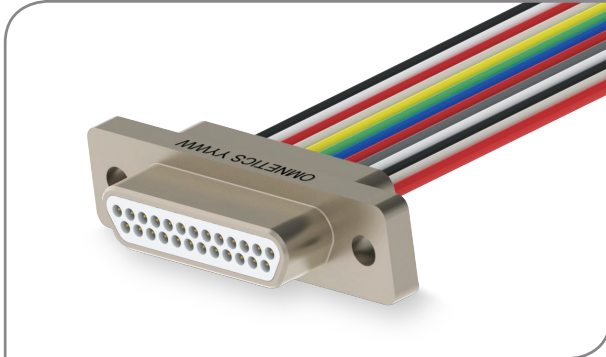
# Micro-D

# Standard Micro-D

## Metal Shell Micro-D Discrete Leadwire (TYPE WD) Ordering Guide

Series	# of Contacts	Shell Material and Finish	Hardware	Termination Type	Options
<b>MMD</b> Male (P - Pin) 	<b>009</b>	<b>N (STD)</b>	<b>00</b> - NONE, Ø .092 HOLE (STD)	<b>WD</b> - Discrete Leadwire  <b>WIRE AWG:</b> 6 - 26 AWG (STD) 8 - 28 AWG 0 - 30 AWG <b>WIRE TYPE:</b> Q - NEMA HP3 (FORMERLY M16878/4 &/6) (STD) R - M22759/11 S - M22759/33 <b>WIRE LENGTH:</b> 18.0 - 18.00" (STD) XX.X - CUSTOM LENGTH <b>COLOR SCHEME:</b> 1 - 10 REPEATING (STD) 2 - BLUE 3 - WHITE 5 - YELLOW	<b>HT</b> High Temp. Epoxy (200°C)  <b>RH</b> RoHS COMPLIANT 
	<b>015</b>	Aluminum Shell, Electroless Nickel Plated	<b>01</b> - FIXED JACK-POSTS (STD)		
	<b>021</b>	Aluminum Shell, Cadmium Plated	<b>02</b> - JACKSCREWS, STD LENGTH, HEX HEAD (STD)		
	<b>025</b>		<b>03</b> - JACKSCREWS, STD LENGTH, SLOTTED		
	<b>031</b>	Aluminum Shell, Black Anodized	<b>04</b> - JACKSCREWS, LONG, HEX		
	<b>037</b>		<b>05</b> - JACKSCREWS, LONG, SLOTTED		
	<b>051*</b>	Stainless Steel Shell, Passivated	<b>06</b> - <b>07</b> FLOAT-MOUNT OPTIONS		
	<b>069</b>				
	<b>100</b>				
	Female (S - Socket) 	*Use 512 for Two Row 051 and 513 for Three Row 051			

Example



MMDP-025-N00-WD6Q18.0-1-HT

### Standard

"n"	Rows	FEMALE	MALE
9	2	A99100-009	A98100-009
15	2	A99100-015	A98100-015
21	2	A99100-021	A98100-021
25	2	A99100-025	A98100-025
31	2	A99100-031	A98100-031
37	2	A99100-037	A98100-037
51	2	A99100-512	A98100-512
51	3	A99100-513	A98100-513
69	3	A99100-069	A98100-069
100	4	A99100-100	A98100-100